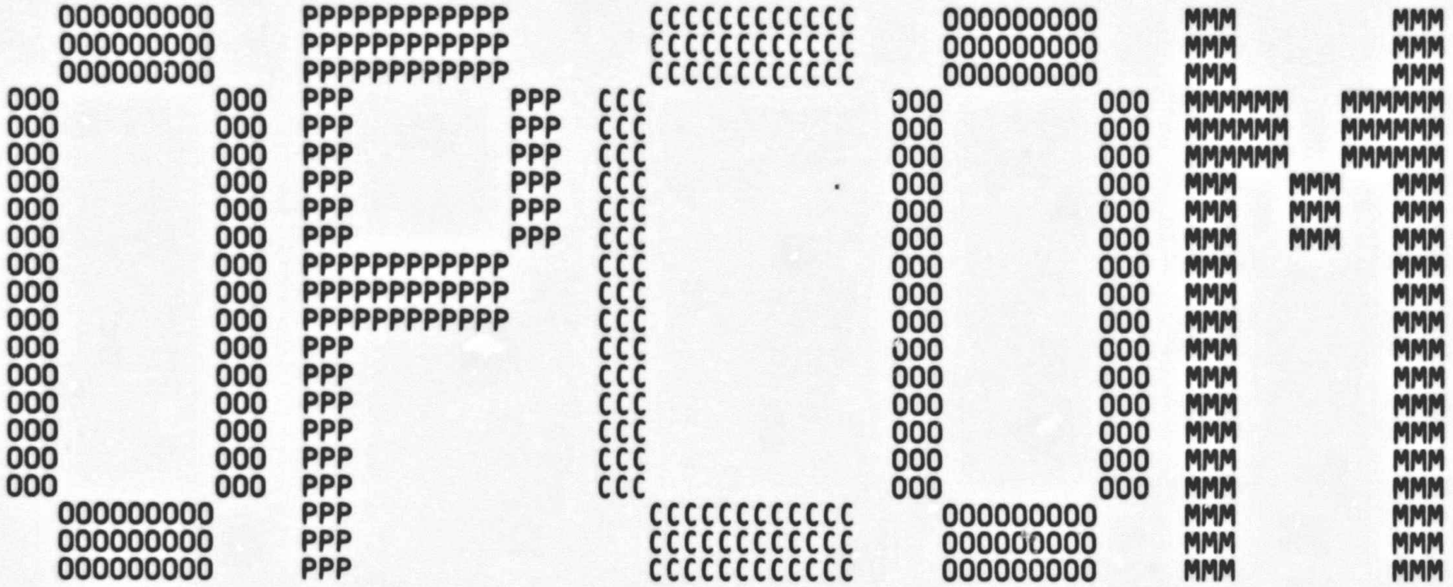

```
  SSSSSSSS  HH      HH    AAAAAA    RRRRRRRR    EEEEEEEEEE
  SSSSSSSS  HH      HH    AAAAAA    RRRRRRRR    EEEEEEEEEE
SS          HH      HH  AA      AA  RR      RR  EE
SS          HH      HH  AA      AA  RR      RR  EE
SS          HH      HH  AA      AA  RR      RR  EE
SS          HH      HH  AA      AA  RR      RR  EE
  SSSSSS    HHHHHHHHHH  AA      AA  RRRRRRRR    EEEEEEEE
  SSSSSS    HHHHHHHHHH  AA      AA  RRRRRRRR    EEEEEEEE
        SS  HH      HH  AAAAAAAAAA  RR  RR      EE
        SS  HH      HH  AAAAAAAAAA  RR  RR      EE
        SS  HH      HH  AA      AA  RR    RR    EE              ....
        SS  HH      HH  AA      AA  RR    RR    EE              ....
SSSSSSSS    HH      HH  AA      AA  RR      RR  EEEEEEEEEE      ....
SSSSSSSS    HH      HH  AA      AA  RR      RR  EEEEEEEEEE      ....

LL            IIIIII      SSSSSSSS
LL            IIIIII      SSSSSSSS
LL              II      SS
LL              II      SS
LL              II      SS
LL              II      SS
LL              II        SSSSSS
LL              II        SSSSSS
LL              II              SS
LL              II              SS
LL              II              SS
LL              II              SS
LLLLLLLLLL    IIIIII    SSSSSSSS
LLLLLLLLLL    IIIIII    SSSSSSSS
```

OP
VO

;

```
;     1          0001  0 MODULE  OPC$SHARE_DEVNAME       (                   %TITLE 'SHARE_FULL_DEVNAME'
;     2          0002  0                         , LANGUAGE (BLISS32),
;     3          0003  0                           IDENT = 'V04-000'
;     4          0004  0                         ) =
;     5          0005  0
;     6          0006  0 !*****************************************************************************
;     7          0007  0 !*                                                                           *
;     8          0008  0 !*  COPYRIGHT (c) 1978, 1980, 1982, 1984 BY                                  *
;     9          0009  0 !*  DIGITAL EQUIPMENT CORPORATION, MAYNARD, MASSACHUSETTS.                    *
;    10          0010  0 !*  ALL RIGHTS RESERVED.                                                      *
;    11          0011  0 !*                                                                           *
;    12          0012  0 !*  THIS SOFTWARE IS FURNISHED UNDER A LICENSE AND MAY BE USED AND COPIED    *
;    13          0013  0 !*  ONLY IN  ACCORDANCE WITH  THE  TERMS  OF  SUCH  LICENSE  AND WITH THE   *
;    14          0014  0 !*  INCLUSION OF THE ABOVE COPYRIGHT NOTICE. THIS SOFTWARE OR  ANY  OTHER    *
;    15          0015  0 !*  COPIES THEREOF MAY NOT BE PROVIDED OR OTHERWISE MADE AVAILABLE TO ANY    *
;    16          0016  0 !*  OTHER PERSON.  NO TITLE TO AND OWNERSHIP OF  THE  SOFTWARE IS  HEREBY    *
;    17          0017  0 !*  TRANSFERRED.                                                              *
;    18          0018  0 !*                                                                           *
;    19          0019  0 !*  THE INFORMATION IN THIS SOFTWARE IS  SUBJECT TO CHANGE WITHOUT NOTICE    *
;    20          0020  0 !*  AND  SHOULD  NOT  BE  CONSTRUED AS  A COMMITMENT BY DIGITAL EQUIPMENT    *
;    21          0021  0 !*  CORPORATION.                                                              *
;    22          0022  0 !*                                                                           *
;    23          0023  0 !*  DIGITAL ASSUMES NO RESPONSIBILITY FOR THE USE  OR  RELIABILITY OF ITS    *
;    24          0024  0 !*  SOFTWARE ON EQUIPMENT WHICH IS NOT SUPPLIED BY DIGITAL.                   *
;    25          0025  0 !*                                                                           *
;    26          0026  0 !*                                                                           *
;    27          0027  0 !*****************************************************************************
;    28          0028  0
;    29          0029  0 !++
;    30          0030  0 ! FACILITY:
;    31          0031  0 !
;    32          0032  0 !       OPCOM
;    33          0033  0 !
;    34          0034  0 ! ABSTRACT:
;    35          0035  0 !
;    36          0036  0 !       This file contains routines shared by OPCOM, REPLY and REQUEST.
;    37          0037  0 !       Each routine is compiled as a separate module so that unnecessary
;    38          0038  0 !       code is not included at link time.
;    39          0039  0 !
;    40          0040  0 ! Environment:
;    41          0041  0 !
;    42          0042  0 !       VAX/VMS operating system.
;    43          0043  0 !
;    44          0044  0 ! Author:
;    45          0045  0 !
;    46          0046  0 !       CW Hobbs
;    47          0047  0 !
;    48          0048  0 ! Creation date:
;    49          0049  0 !
;    50          0050  0 !       31 July 1983
;    51          0051  0 !
;    52          0052  0 ! Revision history:
;    53          0053  0 !
;    54          0054  0 !       V03-003 CWH3169         CW Hobbs                        5-May-1984
;    55          0055  0 !               Second pass for cluster-wide OPCOM:
;    56          0056  0 !                - Make DVI$_xxxNAM an input item for SHARE_FULL_DEVNAME so
;    57          0057  0 !                  that calling routine can pick a name.
```

```
;    58          0058  0 !                - Delete the entire timeout count module, it is no longer
;    59          0059  0 !                  necessary with the queued $brkthru mechanism.
;    60          0060  0 !
;    61          0061  0 !       V03-002 CWH3002         CW Hobbs                    16-Sep-1983
;    62          0062  0 !                Add timeout routine and VM jacket routines.
;    63          0063  0 !
;    64          0064  0 !--
;    65          0065  1 BEGIN
;    66          0066  1
;    67          0067  1 LIBRARY 'SYS$LIBRARY:LIB';
;    68          0068  1 LIBRARY 'LIB$:OPCOMLIB';
;    69          0069  1
;    70          0070  1 GLOBAL ROUTINE SHARE_FULL_DEVNAME (DEVNAME : $ref_bblock, NAME_CODE) =  %SBTTL 'share_full_devname (devname,
;    71          0071  1
;    72          0072  1 !++
;    73          0073  1 ! Functional description:
;    74          0074  1 !
;    75          0075  1 !       Take the device name passed as input, and return a fully qualified device spec.  This will include
;    76          0076  1 !       the SCS nodename if that is defined.  Note that the descriptor is OWN storage inside of this routine
;    77          0077  1 !       so that this routine is non-reentrant.
;    78          0078  1 !
;    79          0079  1 ! Input:
;    80          0080  1 !
;    81          0081  1 !       DEVNAME         : Address of a quadword buffer descriptor that
;    82          0082  1 !                         points to the buffer containing the device name
;    83          0083  1 !       NAME_CODE       : DVI$_xxxNAM, the device name item code
;    84          0084  1 !
;    85          0085  1 ! Implicit Input:
;    86          0086  1 !
;    87          0087  1 !       None.
;    88          0088  1 !
;    89          0089  1 ! Output:
;    90          0090  1 !
;    91          0091  1 !       None.
;    92          0092  1 !
;    93          0093  1 ! Implict output:
;    94          0094  1 !
;    95          0095  1 !       None.
;    96          0096  1 !
;    97          0097  1 ! Side effects:
;    98          0098  1 !
;    99          0099  1 !       None.
;   100          0100  1 !
;   101          0101  1 ! Routine value:
;   102          0102  1 !
;   103          0103  1 !       Descriptor pointing to fullname.  If unable to modify name, input descriptor will returned.
;   104          0104  1 !--
;   105          0105  1
;   106          0106  2 BEGIN                                           ! Start of SHARE_FULL_DEVNAME
;   107          0107  2
;   108          0108  2 OWN
;   109          0109  2         NAME_BUFFER     : VECTOR [MAX_DEV_NAM, BYTE],
;   110          0110  2         NAME_DESC       : VECTOR [2, LONG] INITIAL (0,NAME_BUFFER),
;   111          0111  2         SEC_NAME_BUFFER : VECTOR [MAX_DEV_NAM, BYTE],
;   112          0112  2         SEC_NAME_DESC   : VECTOR [2, LONG] INITIAL (0,SEC_NAME_BUFFER),
;   113          0113  2         SPOOLED         : LONG,
;   114          0114  2         DVI_LIST        : VECTOR [10, LONG] INITIAL (
```

```
;  115          0115  2                                    MAX_DEV_NAM,                                        ! Add item code at run time
;  116          0116  2                                    NAME_BUFFER,
;  117          0117  2                                    NAME_DESC,
;  118          0118  2                                    MAX_DEV_NAM,                                        ! Add code at run time
;  119          0119  2                                    SEC_NAME_BUFFER,
;  120          0120  2                                    SEC_NAME_DESC,
;  121          0121  2                                    ((DVI$_SPL OR DVI$C_SECONDARY)^16 OR 4),            ! Is the secondary spooled?
;  122          0122  2                                    SPOOLED,
;  123          0123  2                                    0,
;  124          0124  2                                    0);
;  125          0125  2
;  126          0126  2
;  127          0127  2  ! Get the name, if any problem then return the address of the input descriptor
;  128          0128  2  !
;  129          0129  2  (DVI_LIST [0])<16,16,0> = .NAME_CODE;                      ! Put name item code in high word
;  130          0130  2  (DVI_LIST [3])<16,16,0> = (.NAME_CODE OR DVI$C_SECONDARY);
;  131          0131  3  IF NOT ($GETDVIW (DEVNAM=.DEVNAME, ITMLST=DVI_LIST))
;  132          0132  2  THEN
;  133          0133  2      RETURN .DEVNAME;
;  134          0134  2
;  135          0135  2  IF .NAME_DESC [0] EQL 0
;  136          0136  2  THEN
;  137          0137  2      RETURN .DEVNAME;
;  138          0138  2
;  139          0139  2  ! If the device is spooled, return secondary characteristics
;  140          0140  2  !
;  141          0141  2  IF .SPOOLED
;  142          0142  2  THEN
;  143          0143  2      IF .SEC_NAME_DESC [0] NEQ 0
;  144          0144  2      THEN
;  145          0145  2          RETURN SEC_NAME_DESC;
;  146          0146  2
;  147          0147  2  RETURN NAME_DESC;                                        ! If we get this far, it's ok.
;  148          0148  1  END;                                                     ! End of SHARE_FULL_DEVNAME


                                                        .TITLE  OPC$SHARE_DEVNAME SHARE_FULL_DEVNAME
                                                        .IDENT  \V04-000\

                                                        .PSECT  $OWN$,NOEXE,2

                                              00000 NAME_BUFFER:
                                                        .BLKB   64
                                         00000000  00040 NAME_DESC:
                                                        .LONG   0                                                   ;
                                         00000000' 00044        .ADDRESS NAME_BUFFER                                ;
                                                   00048 SEC_NAME_BUFFER:
                                                        .BLKB   64
                                         00000000  00088 SEC_NAME_DESC:
                                                        .LONG   0                                                   ;
                                         00000000' 0008C        .ADDRESS SEC_NAME_BUFFER                            ;
                                                   00090 SPOOLED:.BLKB   4
                                         00000040  00094 DVI_LIST:
                                                        .LONG   64                                                  ;
                                00000000' 00000000' 00098       .ADDRESS NAME_BUFFER, NAME_DESC                     ;
                                          00000040  000A0       .LONG   64                                          ;
                                00000000' 00000000' 000A4       .ADDRESS SEC_NAME_BUFFER, SEC_NAME_DESC             ;
```

```
                                    00530004  000AC          .LONG   5439492                                          ;
                                    00000000' 000B0          .ADDRESS SPOOLED                                         ;
                           00000000 00000000  000B4          .LONG   0, 0                                             ;

                                               .EXTRN  SYS$GETDVIW

                                               .PSECT  $CODE$,NOWRT,2

                                         0004 00000          .ENTRY  SHARE_FULL_DEVNAME, Save R2                      ; 0070
                              52   0000' CF   9E 00002         MOVAB   DVI_LIST, R2                                     ;
                        02    A2     08  AC   B0 00007         MOVW    NAME_CODE, DVI_LIST+2                            ; 0129
                  0E    A2          08  AC   01 A9 0000C       BISW3   #1, NAME_CODE, DVI_LIST+14                       ; 0130
                                          7E   7C 00012         CLRQ    -(SP)                                            ; 0131
                                          7E   7C 00014         CLRQ    -(SP)                                            ;
                                          52   DD 00016         PUSHL   R2                                               ;
                                       04 AC   DD 00018         PUSHL   DEVNAME                                          ;
                                          7E   7C 0001B         CLRQ    -(SP)                                            ;
                     00000000G  00            08 FB 0001D       CALLS   #8, SYS$GETDVIW                                  ;
                              05              50 E9 00024       BLBC    R0, 1$                                           ;
                                    AC        A2 D5 00027       TSTL    NAME_DESC                                        ; 0135
                                              05 12 0002A       BNEQ    2$                                               ;
                              50    04        AC D0 0002C 1$:   MOVL    DEVNAME, R0                                      ; 0137
                                              04 00030          RET                                                      ;
                              0A    FC        A2 E9 00031 2$:   BLBC    SPOOLED, 3$                                      ; 0141
                                    F4        A2 D5 00035       TSTL    SEC_NAME_DESC                                    ; 0143
                                              05 13 00038       BEQL    3$                                               ;
                              50    F4        A2 9E 0003A       MOVAB   SEC_NAME_DESC, R0                                ; 0145
                                              04 0003E          RET                                                      ;
                              50    AC        A2 9E 0003F 3$:   MOVAB   NAME_DESC, R0                                   ; 0147
                                              04 00043          RET                                                      ; 0148

; Routine Size:  68 bytes,    Routine Base:  $CODE$ + 0000

;  149          0149  1 END
;  150          0150  0 ELUDOM


;                                    PSECT SUMMARY

;      Name                    Bytes                          Attributes

;  $OWN$                         188  NOVEC,  WRT,  RD ,NOEXE,NOSHR,  LCL,  REL,  CON,NOPIC,ALIGN(2)
;  $CODE$                         68  NOVEC,NOWRT,  RD ,  EXE,NOSHR,  LCL,  REL,  CON,NOPIC,ALIGN(2)


;                                  Library Statistics

;                                          -------- Symbols --------      Pages       Processing
;      File                                Total    Loaded   Percent      Mapped      Time
```

```
;  _$255$DUA28:[SYSLIB]LIB.L32;1              18619        6        0      1000          00:01.8
;  _$255$DUA28:[OPCOM.OBJ]OPCOMLIB.L32;1        633        2        0        43          00:00.8



;                                    COMMAND QUALIFIERS

;       BLISS/CHECK=(FIELD,INITIAL,OPTIMIZE)/LIS=LIS$:SHARE/OBJ=OBJ$:SHARE MSRC$:SHARE/UPDATE=(ENH$:SHARE)
```

```
;  152          0151  0 MODULE  OPC$SHARE_FAOBUF (IDENT = 'V03-001') =  %TITLE 'SHARE_FAO_BUFFER'       %SBTTL 'share_fao_buffer (ct
;  153          0152  1 BEGIN
;  154          0153  1
;  155          0154  1 LIBRARY 'SYS$LIBRARY:LIB';
;  156          0155  1 LIBRARY 'LIB$:OPCOMLIB';
;  157          0156  1
;  158          0157  1 GLOBAL ROUTINE SHARE_FAO_BUFFER (ctrstr : REF VECTOR[2], args : VECTOR [4]) =   %SBTTL 'SHARE_FAO_BUFFER'
;  159          0158  2 BEGIN
;  160          0159  2 !++
;  161          0160  2 !
;  162          0161  2 ! FUNCTIONAL DESCRIPTION:
;  163          0162  2 !
;  164          0163  2 !       This routine passes an ascii string through the FAO system service with any number of specified para
;  165          0164  2 !
;  166          0165  2 ! INPUTS:
;  167          0166  2 !
;  168          0167  2 !       ctrstr  Address of FAO control string descriptor
;  169          0168  2 !       args    Any number of additional arguments
;  170          0169  2 !
;  171          0170  2 ! IMPLICIT INPUTS:
;  172          0171  2 !
;  173          0172  2 !       none
;  174          0173  2 !
;  175          0174  2 ! OUTPUTS:
;  176          0175  2 !
;  177          0176  2 !       none
;  178          0177  2 !
;  179          0178  2 ! IMPLICIT OUTPUTS:
;  180          0179  2 !
;  181          0180  2 !       none
;  182          0181  2 !
;  183          0182  2 ! ROUTINE VALUE:
;  184          0183  2 !
;  185          0184  2 !       Address of formatted descriptor
;  186          0185  2 !
;  187          0186  2 ! SIDE EFFECTS:
;  188          0187  2 !
;  189          0188  2 !       none
;  190          0189  2 !--
;  191          0190  2 OWN
;  192          0191  2     DESC : VECTOR [2, LONG],
;  193          0192  2     FAOBUF : VECTOR [512, BYTE]
;  194          0193  2     ;
;  195          0194  2
;  196          0195  2 DESC [0] = 512;                                 ! Set up result descriptor
;  197          0196  2 DESC [1] = FAOBUF;
;  198          0197  2
;  199          0198  2 $FAOL (CTRSTR=.CTRSTR, OUTLEN=DESC, OUTBUF=DESC, PRMLST=ARGS);
;  200          0199  2
;  201          0200  2 RETURN DESC;
;  202          0201  1 END;


                                                .TITLE  OPC$SHARE_FAOBUF SHARE_FAO_BUFFER
                                                .IDENT  \V03-001\

                                                .PSECT  $OWN$,NOEXE,2
```

```
                                                00000 DESC:   .BLKB   8
                                                00008 FAOBUF: .BLKB   512

                                                              .EXTRN  SYS$FAOL

                                                              .PSECT  $CODE$,NOWRT,2

                                                  0004 00000          .ENTRY  SHARE_FAO_BUFFER, Save R2                       ; 0157
                                       52   0000' CF   9E 00002       MOVAB   DESC, R2                                        ;
                                       62   0200  8F   3C 00007       MOVZWL  #512, DESC                                      ; 0195
                                 04    A2     08  A2   9E 0000C       MOVAB   FAOBUF, DESC+4                                  ; 0196
                                            08  AC   9F 00011       PUSHAB  ARGS                                            ; 0198
                                                52   DD 00014       PUSHL   R2                                              ;
                                                52   DD 00016       PUSHL   R2                                              ;
                                            04  AC   DD 00018       PUSHL   CTRSTR                                          ;
                           00000000G    00          04   FB 0001B   CALLS   #4, SYS$FAOL                                   ;
                                        50          62   9E 00022   MOVAB   DESC, R0                                       ; 0200
                                                    04   00025   RET                                                        ; 0201

; Routine Size:  38 bytes,    Routine Base:  $CODE$ + 0000

;  203          0202  1
;  204          0203  1 END                                                ! End of SHARE$FAOBUF
;  205          0204  0 ELUDOM



;                                PSECT SUMMARY

;       Name                    Bytes                           Attributes

;  $OWN$                          520  NOVEC,  WRT,  RD ,NOEXE,NOSHR,  LCL,  REL,  CON,NOPIC,ALIGN(2)
;  $CODE$                          38  NOVEC,NOWRT,  RD ,  EXE,NOSHR,  LCL,  REL,  CON,NOPIC,ALIGN(2)


;                              Library Statistics

;                                        --------- Symbols ---------      Pages       Processing
;       File                             Total    Loaded   Percent      Mapped       Time

;  _$255$DUA28:[SYSLIB]LIB.L32;1          18619         3         0        1000       00:01.8
;  _$255$DUA28:[OPCOM.OBJ]OPCOMLIB.L32;1    633         0         0          43       00:00.7


;                               COMMAND QUALIFIERS
```

```
;       BLISS/CHECK=(FIELD,INITIAL,OPTIMIZE)/LIS=LIS$:SHARE/OBJ=OBJ$:SHARE MSRC$:SHARE/UPDATE=(ENH$:SHARE)
```

```
;  207          0205  0 MODULE  OPC$SHARE_VM (IDENT = 'V03-001') =      %TITLE 'OPC$SHARE_VM'   %SBTTL 'OPC$GET_VM (len, addr)'
;  208          0206  1 BEGIN
;  209          0207  1
;  210          0208  1 LIBRARY 'SYS$LIBRARY:LIB';
;  211          0209  1 LIBRARY 'LIB$:OPCOMLIB';
;  212          0210  1
;  213          0211  1 GLOBAL ROUTINE OPC$GET_VM (len, addr) =
;  214          0212  2 BEGIN
;  215          0213  2 !++
;  216          0214  2 !
;  217          0215  2 ! FUNCTIONAL DESCRIPTION:
;  218          0216  2 !
;  219          0217  2 !       This routine calls LIB$GET_VM
;  220          0218  2 !
;  221          0219  2 !--
;  222          0220  2 LOCAL
;  223          0221  2     STATUS;
;  224          0222  2
;  225          0223  2 STATUS = LIB$GET_VM (.LEN, .ADDR);
;  226          0224  2
;  227          0225  2 RETURN .STATUS;
;  228          0226  1 END;

                                                                .TITLE  OPC$SHARE_VM OPC$SHARE_VM
                                                                .IDENT  \V03-001\

                                                                .EXTRN  OPC$GET_VM, LIB$GET_VM

                                                                .PSECT  $CODE$,NOWRT,2

                                                 0000 00000     .ENTRY  OPC$GET_VM, Save nothing                        ; 0211
                                        7E       04   AC  7D 00002 MOVQ    LEN, -(SP)                                 ; 0223
                                00000000G 00          02  FB 00006 CALLS   #2, LIB$GET_VM
                                                      04  0000D RET                                                    ; 0226

; Routine Size:  14 bytes,    Routine Base:  $CODE$ + 0000

;  229          0227  1
;  230          0228  1 GLOBAL ROUTINE OPC$FREE_VM (len, addr) =      %SBTTL 'OPC$FREE_VM (len, addr)'
;  231          0229  2 BEGIN
;  232          0230  2 !++
;  233          0231  2 !
;  234          0232  2 ! FUNCTIONAL DESCRIPTION:
;  235          0233  2 !
;  236          0234  2 !       This routine calls LIB$FREE_VM
;  237          0235  2 !
;  238          0236  2 !--
;  239          0237  2 LOCAL
;  240          0238  2     STATUS;
;  241          0239  2
;  242          0240  2 STATUS = LIB$FREE_VM (.LEN, .ADDR);
;  243          0241  2
;  244          0242  2 RETURN .STATUS;
;  245          0243  1 END;
```

```
                                                        .EXTRN  OPC$FREE_VM, LIB$FREE_VM

                                                0000 00000      .ENTRY  OPC$FREE_VM, Save nothing                ; 0228
                                    7E      04  AC  7D 00002    MOVQ    LEN, -(SP)                               ; 0240
                          00000000G 00          02  FB 00006    CALLS   #2, LIB$FREE_VM                          ;
                                                    04 0000D    RET                                              ; 0243

; Routine Size:  14 bytes,    Routine Base:  $CODE$ + 000E

;  246          0244  1
;  247          0245  1 END                                    ! End of OPC$SHARE_VM
;  248          0246  0 ELUDOM




;                                PSECT SUMMARY
;
;       Name                    Bytes                           Attributes
;
;  $CODE$                         28  NOVEC,NOWRT,  RD ,  EXE,NOSHR,  LCL,  REL,  CON,NOPIC,ALIGN(2)


;                           Library Statistics
;                                    --------  Symbols  --------      Pages       Processing
;       File                         Total     Loaded   Percent      Mapped      Time
;
;  _$255$DUA28:[SYSLIB]LIB.L32;1       18619          0         0        1000        00:01.8
;  _$255$DUA28:[OPCOM.OBJ]OPCOMLIB.L32;1     633          4         0          43        00:00.7


;                                   COMMAND QUALIFIERS
;
;       BLISS/CHECK=(FIELD,INITIAL,OPTIMIZE)/LIS=LIS$:SHARE/OBJ=OBJ$:SHARE MSRC$:SHARE/UPDATE=(ENH$:SHARE)
```

```
;  250          0247  0 MODULE  OPC$SHARE_LOOKOPERBIT (IDENT = 'V03-001') =     %TITLE 'SHARE_LOOKOPERBIT'      %SBTTL 'share_init_o
;  251          0248  1 BEGIN
;  252          0249  1
;  253          0250  1 LIBRARY 'SYS$LIBRARY:LIB';
;  254          0251  1 LIBRARY 'LIB$:OPCOMLIB';
;  255          0252  1
;  256          0253  1 EXTERNAL ROUTINE
;  257          0254  1     share_trnlog : NOVALUE;
;  258          0255  1
;  259          0256  1 LITERAL
;  260          0257  1         MAX_OPERBIT = 24;
;  261          0258  1
;  262          0259  1 OWN
;  263          0260  1         OPER_NAME       : VECTOR  [MAX_OPERBIT,LONG] PRESET  (
;  264          0261  1                                 [0] = OPC$_CENTRL,      [1] = OPC$_PRINT,       [2] = OPC$_TAPES,
;  265          0262  1                                 [3] = OPC$_DISKS,       [4] = OPC$_DEVICE,      [5] = OPC$_CARDS,
;  266          0263  1                                 [6] = OPC$_NTWORK,      [7] = OPC$_CLUSTER,     [8] = OPC$_SECURITY,
;  267          0264  1                                 [9] = OPC$_REPLY,      [10] = OPC$_SOFTWARE,   [11] = OPC$_FILL_11,
;  268          0265  1                                [12] = OPC$_OPER1,      [13] = OPC$_OPER2,      [14] = OPC$_OPER3,
;  269          0266  1                                [15] = OPC$_OPER4,      [16] = OPC$_OPER5,      [17] = OPC$_OPER6,
;  270          0267  1                                [18] = OPC$_OPER7,      [19] = OPC$_OPER8,      [20] = OPC$_OPER9,
;  271          0268  1                                [21] = OPC$_OPER10,     [22] = OPC$_OPER11,     [23] = OPC$_OPER12);
;  272          0269  1
;  273          0270  1 GLOBAL
;  274          0271  1         OPER_KEYTBL     : VECTOR [((MAX_OPERBIT*2)+1),LONG] PRESET ([0] = MAX_OPERBIT*2);
;  275          0272  1
;  276          0273  1 ROUTINE SHARE_INIT_OPER_KEYTBL : NOVALUE =
;  277          0274  2 BEGIN
;  278          0275  2 !++
;  279          0276  2 !
;  280          0277  2 ! FUNCTIONAL DESCRIPTION:
;  281          0278  2 !
;  282          0279  2 !       This routine performs run-time initializations on the operator name keyword table.
;  283          0280  2 !
;  284          0281  2 ! INPUTS:
;  285          0282  2 !
;  286          0283  2 !       None.
;  287          0284  2 !
;  288          0285  2 ! IMPLICIT INPUTS:
;  289          0286  2 !
;  290          0287  2 !       none
;  291          0288  2 !
;  292          0289  2 ! OUTPUTS:
;  293          0290  2 !
;  294          0291  2 !       none
;  295          0292  2 !
;  296          0293  2 ! IMPLICIT OUTPUTS:
;  297          0294  2 !
;  298          0295  2 !       none
;  299          0296  2 !
;  300          0297  2 ! ROUTINE VALUE:
;  301          0298  2 !
;  302          0299  2 !       none
;  303          0300  2 !
;  304          0301  2 ! SIDE EFFECTS:
;  305          0302  2 !
;  306          0303  2 !       none
```

```
;   307          0304  2 !--
;   308          0305  2 !
;   309          0306  2 LOCAL
;   310          0307  2     buff : VECTOR [64, BYTE],
;   311          0308  2     desc : VECTOR [2, LONG] PRESET ([1] = buff),
;   312          0309  2     msg,
;   313          0310  2     len,
;   314          0311  2     adr : REF VECTOR [, BYTE],
;   315          0312  2     status;
;   316          0313  2 !
;   317          0314  2 ! Loop through the name vector, for each non-zero entry fetch the message text and create a string
;   318          0315  2 ! from the message.  Store a pointer to the string descriptor back in the vector.
;   319          0316  2 !
;   320          0317  2 INCR i FROM 0 TO MAX_OPERBIT-1
;   321          0318  2 DO
;   322          0319  3     BEGIN
;   323          0320  3     IF (msg = .oper_name [.i]) EQL 0            ! We assume no holes
;   324          0321  3     THEN
;   325          0322  3         $signal_stop (ss$_badparam);
;   326          0323  3     !
;   327          0324  3     ! Reset the buffer length, and get the message text.  Any problem is fatal.
;   328          0325  3     !
;   329          0326  3     desc [0] = 64;
;   330          0327  4     IF NOT (status = $getmsg (msgid=.msg, msglen=desc, bufadr=desc, flags=1))
;   331          0328  3     THEN
;   332          0329  3         $signal_stop (.status);
;   333          0330  3     !
;   334          0331  3     ! Allocate and initialize a counted string, store info in the keytbl
;   335          0332  3     !
;   336          0333  3     len = .desc [0] + 1;                        ! String plus ASCIC count byte
;   337          0334  4     IF NOT (status = OPC$GET_VM (len, adr))     ! Get memory, store address right into keytable
;   338          0335  3     THEN
;   339          0336  3         $signal_stop (.status);
;   340          0337  3     adr [0] = .desc [0];                        ! Set the ascic count byte
;   341          0338  3     CH$MOVE (.desc [0], .desc [1], adr [1]);    ! Copy the string to the new memory
;   342          0339  3     oper_keytbl [(2*.i)+1] = .adr;              ! Store the address in the keytbl
;   343          0340  3     oper_keytbl [(2*.i)+2]   = .i;              ! Store the index in the keytbl
;   344          0341  2     END;
;   345          0342  2
;   346          0343  2 RETURN;
;   347          0344  1 END;


                                                                .TITLE  OPC$SHARE_LOOKOPERBIT SHARE_LOOKOPERBIT
                                                                .IDENT  \V03-001\

                                                                .PSECT  $OWN$,NOEXE,2

00058123  0005811B  00058113  0005810B  00058103  000580FB  00000 OPER_NAME:
                                                                .LONG   360699, 360707, 360715, 360723, 360731, -   ;
00058153  0005814B  00058143  0005813B  00058133  0005812B  00018             360739, 360747, 360755, 360763, 360771, -   ;
00058183  0005817B  00058173  0005816B  00058163  0005815B  00030             360779, 360787, 360795, 360803, 360811, -   ;
000581B3  000581AB  000581A3  0005819B  00058193  0005818B  00048             360819, 360827, 360835, 360843, 360851, -   ;
                                                                            360859, 360867, 360875, 360883              ;

                                                                .PSECT  $GLOBAL$,NOEXE,2
```

```
                                00000030  00000 OPER_KEYTBL::
                                                .LONG   48                                              ;
                                          00004 .BLKB   192

                                                .EXTRN  SHARE_TRNLOG, LIB$STOP
                                                .EXTRN  SYS$GETMSG, OPC$GET_VM

                                                .PSECT  $CODE$,NOWRT,2

                                          03FC 00000 SHARE_INIT_OPER_KEYTBL:
                                                .WORD   Save R2,R3,R4,R5,R6,R7,R8,R9                    ; 0273
                          5E      B0    AE  9E 00002        MOVAB   -80(SP), SP                         ;
                          08      AE    D4 00006            CLRL    DESC                                ; 0308
                    0C    AE      10    AE  9E 00009        MOVAB   BUFF, DESC+4                        ;
                                  56    D4 0000E            CLRL    I                                   ; 0317
                          59  0000'CF46   D0 00010 1$:       MOVL    OPER_NAME[I], MSG                   ; 0320
                                  04    12 00016            BNEQ    2$                                  ;
                                  14    DD 00018            PUSHL   #20                                 ; 0322
                                  35    11 0001A            BRB     4$                                  ;
                          08      AE    40  8F  9A 0001C 2$:  MOVZBL  #64, DESC                         ; 0326
                          7E            01  7D 00021        MOVQ    #1, -(SP)                           ; 0327
                                  10    AE  9F 00024        PUSHAB  DESC                                ;
                                  14    AE  9F 00027        PUSHAB  DESC                                ;
                                        59  DD 0002A        PUSHL   MSG                                 ;
                    00000000G     00        05  FB 0002C    CALLS   #5, SYS$GETMSG                      ;
                          58              50  D0 00033    MOVL    R0, STATUS                          ;
                          16              58  E9 00036    BLBC    STATUS, 3$                          ;
              04  AE      08      AE      01  C1 00039    ADDL3   #1, DESC, LEN                       ; 0333
                                        5E  DD 0003F        PUSHL   SP                                  ; 0334
                                  08    AE  9F 00041        PUSHAB  LEN                                 ;
                        0000G     CF      02  FB 00044    CALLS   #2, OPC$GET_VM                      ;
                          58              50  D0 00049    MOVL    R0, STATUS                          ;
                          0A              58  E8 0004C    BLBS    STATUS, 5$                          ;
                                          58  DD 0004F 3$:  PUSHL   STATUS                             ; 0336
                    00000000G     00        01  FB 00051 4$:  CALLS   #1, LIB$STOP                     ;
                                        04  00058          RET                                         ;
                          57              6E  D0 00059 5$:  MOVL    ADR, R7                           ; 0337
                          67      08    AE  90 0005C        MOVB    DESC, (R7)                          ;
              01  A7      0C      BE      08  AE  28 00060    MOVC3   DESC, @DESC+4, 1(R7)                ; 0338
                    50            56      01  78 00067    ASHL    #1, I, R0                           ; 0339
                        0000'CF40           57  D0 0006B    MOVL    R7, OPER_KEYTBL+4[R0]               ;
                    50            56      01  78 00071    ASHL    #1, I, R0                           ; 0340
                        0000'CF40           56  D0 00075    MOVL    I, OPER_KEYTBL+8[R0]                ;
                    91            56        17  F3 0007B    AOBLEQ  #23, I, 1$                          ; 0317
                                            04  0007F        RET                                         ; 0344

; Routine Size:  128 bytes,    Routine Base:  $CODE$ + 0000
```

```
;  349          0345  1 GLOBAL ROUTINE SHARE_LOOKUP_OPER_BIT (TEXT : $ref_bblock) =     %SBTTL 'share_lookup_oper_bit'
;  350          0346  2 BEGIN
;  351          0347  2 !++
;  352          0348  2 !
;  353          0349  2 ! FUNCTIONAL DESCRIPTION:
;  354          0350  2 !
;  355          0351  2 !       This routine converts a text string for an operator name into that operators bit index in
;  356          0352  2 !       the operator attention mask.
;  357          0353  2 !
;  358          0354  2 ! INPUTS:
;  359          0355  2 !
;  360          0356  2 !       None.
;  361          0357  2 !
;  362          0358  2 ! IMPLICIT INPUTS:
;  363          0359  2 !
;  364          0360  2 !       none
;  365          0361  2 !
;  366          0362  2 ! OUTPUTS:
;  367          0363  2 !
;  368          0364  2 !       none
;  369          0365  2 !
;  370          0366  2 ! IMPLICIT OUTPUTS:
;  371          0367  2 !
;  372          0368  2 !       none
;  373          0369  2 !
;  374          0370  2 ! ROUTINE VALUE:
;  375          0371  2 !
;  376          0372  2 !       none
;  377          0373  2 !
;  378          0374  2 ! SIDE EFFECTS:
;  379          0375  2 !
;  380          0376  2 !       none
;  381          0377  2 !--
;  382          0378  2
;  383          0379  2 LOCAL
;  384          0380  2     idx,
;  385          0381  2     status;
;  386          0382  2
;  387          0383  2 IF .oper_keytbl [1] EQL 0
;  388          0384  2 THEN
;  389          0385  2     share_init_oper_keytbl ();                          ! Initialize the oper_keytbl structure
;  390          0386  2 !
;  391          0387  2 ! Translate the name if possible
;  392          0388  2 !
;  393          0389  2 share_trnlog (.text);
;  394          0390  2 !
;  395          0391  2 ! Convert the name to the index value stored in the keyword table
;  396          0392  2 !
;  397          0393  2 status = lib$lookup_key (.text, oper_keytbl, idx);       ! Use the library routine
;  398          0394  2 IF NOT .status
;  399          0395  2 THEN
;  400          0396  2     $signal_stop (opc$_valuerr, 1, .text, .status, 1, .text);
;  401          0397  2
;  402          0398  2 RETURN .idx;
;  403          0399  1 END;
```

```
                                                                .EXTRN  LIB$LOOKUP_KEY

                                                0000 00000      .ENTRY  SHARE_LOOKUP_OPER_BIT, Save nothing             ; 0345
                                5E              04   C2 00002  SUBL2   #4, SP                                        ;
                                        0000'   CF   D5 00005  TSTL    OPER_KEYTBL+4                                  ; 0383
                                                05   12 00009  BNEQ    1$                                             ;
                            FF70    CF          00   FB 0000B  CALLS   #0, SHARE_INIT_OPER_KEYTBL                     ; 0385
                                          04    AC   DD 00010 1$:  PUSHL   TEXT                                       ; 0389
                            0000G   CF          01   FB 00013  CALLS   #1, SHARE_TRNLOG                               ;
                                                5E   DD 00018  PUSHL   SP                                             ; 0393
                                        0000'   CF   9F 0001A  PUSHAB  OPER_KEYTBL                                    ;
                                          04    AC   DD 0001E  PUSHL   TEXT                                           ;
                        00000000G       00          03   FB 00021  CALLS   #3, LIB$LOOKUP_KEY                         ;
                                        1A          50   E8 00028  BLBS    STATUS, 2$                                  ; 0394
                                          04    AC   DD 0002B  PUSHL   TEXT                                           ; 0396
                                                01   DD 0002E  PUSHL   #1                                            ;
                                                50   DD 00030  PUSHL   STATUS                                         ;
                                          04    AC   DD 00032  PUSHL   TEXT                                           ;
                                                01   DD 00035  PUSHL   #1                                            ;
                                     0005825C   8F   DD 00037  PUSHL   #361052                                        ;
                        00000000G       00          06   FB 0003D  CALLS   #6, LIB$STOP                              ;
                                                    04   00044  RET                                                   ;
                                50              6E   DC 00045 2$:  MOVL    IDX, R0                                    ; 0398
                                                    04   00048  RET                                                   ; 0399

; Routine Size:  73 bytes,    Routine Base:  $CODE$ + 0080

;  404          0400  1 END
;  405          0401  0 ELUDOM



;                                PSECT SUMMARY

;      Name                     Bytes                          Attributes

;  $OWN$                          96  NOVEC,  WRT,  RD ,NOEXE,NOSHR,  LCL,  REL,  CON,NOPIC,ALIGN(2)
;  $GLOBAL$                      196  NOVEC,  WRT,  RD ,NOEXE,NOSHR,  LCL,  REL,  CON,NOPIC,ALIGN(2)
;  $CODE$                        201  NOVEC,NOWRT,  RD ,  EXE,NOSHR,  LCL,  REL,  CON,NOPIC,ALIGN(2)



;                              Library Statistics

;                                      --------- Symbols ---------      Pages       Processing
;      File                            Total     Loaded   Percent      Mapped      Time

;  _$255$DUA28:[SYSLIB]LIB.L32;1        18619         30         0        1000       00:01.8
;  _$255$DUA28:[OPCOM.OBJ]OPCOMLIB.L32;1  633          4         0          43       00:00.7
```

```
;                                       COMMAND QUALIFIERS

;       BLISS/CHECK=(FIELD,INITIAL,OPTIMIZE)/LIS=LIS$:SHARE/OBJ=OBJ$:SHARE MSRC$:SHARE/UPDATE=(ENH$:SHARE)
```

```
;  407          0402  0 MODULE  OPC$SHARE_INITOPERNAM (IDENT = 'V03-001') =     %TITLE 'SHARE_INIT_OPER_NAME'   %SBTTL 'share_init_o
;  408          0403  1 BEGIN
;  409          0404  1
;  410          0405  1 LIBRARY 'SYS$LIBRARY:LIB';
;  411          0406  1 LIBRARY 'LIB$:OPCOMLIB';
;  412          0407  1
;  413          0408  1 GLOBAL ROUTINE SHARE_INIT_OPER_NAME : NOVALUE =
;  414          0409  2 BEGIN
;  415          0410  2 !++
;  416          0411  2 !
;  417          0412  2 ! FUNCTIONAL DESCRIPTION:
;  418          0413  2 !
;  419          0414  2 !       This routine performs run-time initializations on the operator name vector.
;  420          0415  2 !
;  421          0416  2 ! INPUTS:
;  422          0417  2 !
;  423          0418  2 !       None.
;  424          0419  2 !
;  425          0420  2 ! IMPLICIT INPUTS:
;  426          0421  2 !
;  427          0422  2 !       none
;  428          0423  2 !
;  429          0424  2 ! OUTPUTS:
;  430          0425  2 !
;  431          0426  2 !       none
;  432          0427  2 !
;  433          0428  2 ! IMPLICIT OUTPUTS:
;  434          0429  2 !
;  435          0430  2 !       none
;  436          0431  2 !
;  437          0432  2 ! ROUTINE VALUE:
;  438          0433  2 !
;  439          0434  2 !       none
;  440          0435  2 !
;  441          0436  2 ! SIDE EFFECTS:
;  442          0437  2 !
;  443          0438  2 !       none
;  444          0439  2 !--
;  445          0440  2
;  446          0441  2 !
;  447          0442  2 ! Define the vector of message codes that describe the text associated with each of the known
;  448          0443  2 ! attention bits.  Undefined bits have a zero message code associated with them.  The order of the
;  449          0444  2 ! entries must coincide with the order of the bits that are defined, including any undefined bits.
;  450          0445  2 ! The run-time initialization of this vector is to take each non-zero entry, fetch the message text
;  451          0446  2 ! associated with that entry, and store a pointer to a string descriptor for the message text.
;  452          0447  2 !
;  453          0448  2 GLOBAL
;  454          0449  2         OPER_NAME       : VECTOR  [64,LONG] PRESET  (
;  455          0450  2                                 [0] = OPC$_CENTRL,      [1] = OPC$_PRINT,       [2] = OPC$_TAPES,
;  456          0451  2                                 [3] = OPC$_DISKS,       [4] = OPC$_DEVICE,      [5] = OPC$_CARDS,
;  457          0452  2                                 [6] = OPC$_NTWORK,      [7] = OPC$_CLUSTER,     [8] = OPC$_SECURITY,
;  458          0453  2                                 [9] = OPC$_REPLY,      [10] = OPC$_SOFTWARE,   [11] = OPC$_FILL_11,
;  459          0454  2                                [12] = OPC$_OPER1,      [13] = OPC$_OPER2,      [14] = OPC$_OPER3,
;  460          0455  2                                [15] = OPC$_OPER4,      [16] = OPC$_OPER5,      [17] = OPC$_OPER6,
;  461          0456  2                                [18] = OPC$_OPER7,      [19] = OPC$_OPER8,      [20] = OPC$_OPER9,
;  462          0457  2                                [21] = OPC$_OPER10,     [22] = OPC$_OPER11,     [23] = OPC$_OPER12);
;  463          0458  2
```

```
;  464          0459  2 LOCAL
;  465          0460  2     buff : VECTOR [64, BYTE],
;  466          0461  2     desc : VECTOR [2, LONG] PRESET ([1] = buff),
;  467          0462  2     msg,
;  468          0463  2     adr : REF VECTOR [, LONG],
;  469          0464  2     status;
;  470          0465  2 !
;  471          0466  2 ! Loop through the name vector, for each non-zero entry fetch the message text and create a string
;  472          0467  2 ! from the message.  Store a pointer to the string descriptor back in the vector.
;  473          0468  2 !
;  474          0469  2 INCR i FROM 0 TO 63
;  475          0470  2 DO
;  476          0471  2     IF (msg = .oper_name [.i]) NEQ 0
;  477          0472  2     THEN
;  478          0473  3         BEGIN
;  479          0474  3         !
;  480          0475  3         ! Reset the buffer length, and get the message text.  Any problem is fatal.
;  481          0476  3         !
;  482          0477  3         desc [0] = 64;
;  483          0478  4         IF NOT (status = $getmsg (msgid=.msg, msglen=desc, bufadr=desc, flags=1))
;  484          0479  3         THEN
;  485          0480  3             $signal_stop (.status);
;  486          0481  3         !
;  487          0482  3         ! Allocate and initialize a descriptor and string
;  488          0483  3         !
;  489          0484  4         IF NOT (status = OPC$GET_VM (%REF (8), adr))
;  490          0485  3         THEN
;  491          0486  3             $signal_stop (.status);
;  492          0487  3         oper_name [.i] = .adr;                  ! Replace the message code with the descriptor address
;  493          0488  3         adr [0] = .desc [0];                    ! Place the string length in the descriptor
;  494          0489  4         IF NOT (status = OPC$GET_VM (adr [0], adr [1]))
;  495          0490  3         THEN
;  496          0491  3             $signal_stop (.status);
;  497          0492  3         CH$MOVE (.desc [0], .desc [1], .adr [1]);
;  498          0493  2         END;
;  499          0494  2
;  500          0495  2 RETURN;
;  501          0496  1 END;


                                                                .TITLE  OPC$SHARE_INITOPERNAM SHARE_INIT_OPER_NAME
                                                                .IDENT  \V03-001\

                                                                .PSECT  $GLOBAL$,NOEXE,2

00058123  0005811B  00058113  0005810B  00058103  000580FB  00000 OPER_NAME::
                                                                .LONG   360699, 360707, 360715, 360723, 360731, -   ;
00058153  0005814B  00058143  0005813B  00058133  0005812B  00018           360739, 360747, 360755, 360763, 360771, -   ;
00058183  0005817B  00058173  0005816B  00058163  0005815B  00030           360779, 360787, 360795, 360803, 360811, -   ;
000581B3  000581AB  000581A3  0005819B  00058193  0005818B  00048           360819, 360827, 360835, 360843, 360851, -   ;
                                                                          360859, 360867, 360875, 360883              ;
                                                            00060         .BLKB   160

                                                                .EXTRN  SYS$GETMSG, LIB$STOP
                                                                .EXTRN  OPC$GET_VM

                                                                .PSECT  $CODE$,NOWRT,2
```

```
                                        01FC 00000          .ENTRY  SHARE_INIT_OPER_NAME, Save R2,R3,R4,R5,R6,- ; 0408
                                                                    R7,R8
                                5E      B0   AE   9E 00002         MOVAB   -80(SP), SP                         ;
                                        08   AE   D4 00006         CLRL    DESC                                ; 0461
                             0C AE      10   AE   9E 00009         MOVAB   BUFF, DESC+4                        ;
                                        56   D4   0000E         CLRL    I                                   ; 0469
                                58  0000'CF46   D0 00010 1$:      MOVL    OPER_NAME[I], MSG                   ; 0471
                                        64   13   00016         BEQL    4$                                  ;
                             08 AE      40   8F   9A 00018         MOVZBL  #64, DESC                           ; 0477
                                7E      01   7D   0001D         MOVQ    #1, -(SP)                           ; 0478
                                        10   AE   9F 00020         PUSHAB  DESC                                ;
                                        14   AE   9F 00023         PUSHAB  DESC                                ;
                                        58   DD   00026         PUSHL   MSG                                 ;
                         00000000G      00        05   FB 00028         CALLS   #5, SYS$GETMSG                      ;
                                57      50   D0   0002F         MOVL    R0, STATUS                          ;
                                36      57   E9   00032         BLBC    STATUS, 2$                          ;
                                        04   AE   9F 00035         PUSHAB  ADR                                 ; 0484
                             04 AE      08   D0   00038         MOVL    #8, 4(SP)                           ;
                                        04   AE   9F 0003C         PUSHAB  4(SP)                               ;
                          0000G CF      02   FB   0003F         CALLS   #2, OPC$GET_VM                      ;
                                57      50   D0   00044         MOVL    R0, STATUS                          ;
                                21      57   E9   00047         BLBC    STATUS, 2$                          ;
                       0000'CF46        04   AE   D0 0004A         MOVL    ADR, OPER_NAME[I]                   ; 0487
                             04 BE      08   AE   D0 00051         MOVL    DESC, @ADR                          ; 0488
                                52      04   AE   D0 00056         MOVL    ADR, R2                             ; 0489
                                        04   A2   9F 0005A         PUSHAB  4(R2)                               ;
                                        08   AE   DD 0005D         PUSHL   ADR                                 ;
                          0000G CF      02   FB   00060         CALLS   #2, OPC$GET_VM                      ;
                                57      50   D0   00065         MOVL    R0, STATUS                          ;
                                0A      57   E8   00068         BLBS    STATUS, 3$                          ;
                                        57   DD   0006B 2$:      PUSHL   STATUS                              ; 0491
                         00000000G      00        01   FB 0006D         CALLS   #1, LIB$STOP                        ;
                                                  04 00074         RET                                         ;
                    04 B2        0C BE      08   AE   28 00075 3$:      MOVC3   DESC, @DESC+4, @4(R2)               ; 0492
                          90             56           3F   F3 0007C 4$:      AOBLEQ  #63, I, 1$                  ; 0471
                                                       04 00080         RET                                         ; 0496

; Routine Size:  129 bytes,    Routine Base:  $CODE$ + 0000

;  502          0497  1 END
;  503          0498  0 ELUDOM



;                                       PSECT SUMMARY
;
;       Name                    Bytes                           Attributes
;
;  $GLOBAL$                        256  NOVEC,  WRT,  RD ,NOEXE,NOSHR,  LCL,  REL,  CON,NOPIC,ALIGN(2)
;  $CODE$                          129  NOVEC,NOWRT,  RD ,  EXE,NOSHR,  LCL,  REL,  CON,NOPIC,ALIGN(2)
```

```
;                               Library Statistics
;
;                                       --------- Symbols ---------       Pages       Processing
;       File                            Total     Loaded    Percent       Mapped      Time
;
;  _$255$DUA28:[SYSLIB]LIB.L32;1         18619         27          0         1000        00:01.8
;  _$255$DUA28:[OPCOM.OBJ]OPCOMLIB.L32;1   633          2          0           43        00:00.8
```

```
;                                       COMMAND QUALIFIERS

;       BLISS/CHECK=(FIELD,INITIAL,OPTIMIZE)/LIS=LIS$:SHARE/OBJ=OBJ$:SHARE MSRC$:SHARE/UPDATE=(ENH$:SHARE)
```

```
;  505          0499  0 MODULE  OPC$SHARE_TRNLOG (IDENT = 'V03-001') =  %TITLE 'SHARE_TRNLOG'   %SBTTL 'share_trnlog (name)'
;  506          0500  1 BEGIN
;  507          0501  1
;  508          0502  1 LIBRARY 'SYS$LIBRARY:LIB';
;  509          0503  1 LIBRARY 'LIB$:OPCOMLIB';
;  510          0504  1
;  511          0505  1 GLOBAL ROUTINE SHARE_TRNLOG (NAME : $ref_bblock) : NOVALUE =
;  512          0506  1 !++
;  513          0507  1 ! Functional description:
;  514          0508  1 !
;  515          0509  1 !       Recursively translate a logical name.
;  516          0510  1 !
;  517          0511  1 ! Input:
;  518          0512  1 !
;  519          0513  1 !       name - Address of dynamic string descriptor for input name
;  520          0514  1 !
;  521          0515  1 ! Implicit Input:
;  522          0516  1 !
;  523          0517  1 !       None.
;  524          0518  1 !
;  525          0519  1 ! Output:
;  526          0520  1 !
;  527          0521  1 !       name - Receives a new dynamic string
;  528          0522  1 !
;  529          0523  1 ! Implict output:
;  530          0524  1 !
;  531          0525  1 !       None.
;  532          0526  1 !
;  533          0527  1 ! Side effects:
;  534          0528  1 !
;  535          0529  1 !       None.
;  536          0530  1 !
;  537          0531  1 ! Routine value:
;  538          0532  1 !
;  539          0533  1 !       None.
;  540          0534  1 !--
;  541          0535  1
;  542          0536  2 BEGIN                                           ! Start of share_trnlog
;  543          0537  2
;  544          0538  2 LOCAL
;  545          0539  2     lcl_buf : $bvector [256],
;  546          0540  2     in_dsc  : VECTOR [2, LONG],
;  547          0541  2     out_dsc : VECTOR [2, LONG],
;  548          0542  2     status;
;  549          0543  2 !
;  550          0544  2 ! If the input string was is not dynamic, scream and shout.
;  551          0545  2 !
;  552          0546  2 IF .name [dsc$b_class] NEQ dsc$k_class_d
;  553          0547  2 THEN
;  554          0548  2     $signal_stop (ss$_badparam);
;  555          0549  2 !
;  556          0550  2 ! Copy the input string to the local buffer
;  557          0551  2 !
;  558          0552  2 CH$MOVE (.name [dsc$w_length], .name [dsc$a_pointer], lcl_buf);
;  559          0553  2 !
;  560          0554  2 ! Set the input and output descriptors up
;  561          0555  2 !
```

```
;  562          0556  2 in_dsc [0] = .name [dsc$w_length];
;  563          0557  2 in_dsc [1] = lcl_buf;
;  564          0558  2 out_dsc [1] = lcl_buf;
;  565          0559  2 !
;  566          0560  2 ! Try up to ten times to translate the name
;  567          0561  2 !
;  568          0562  2 INCR i FROM 0 TO 10
;  569          0563  2 DO
;  570          0564  3     BEGIN
;  571          0565  3     !
;  572          0566  3     ! We didn't find the end, give an error
;  573          0567  3     !
;  574          0568  3     IF .i GEQ 10
;  575          0569  3     THEN
;  576          0570  3         $signal_stop (opc$_valuerr, 1, .name, ss$_toomanylnam);
;  577          0571  3     !
;  578          0572  3     ! Set up the output descriptor
;  579          0573  3     !
;  580          0574  3     out_dsc [0] = 256;
;  581          0575  3     !
;  582          0576  3     ! Attempt to translate
;  583          0577  3     !
;  584          0578  3     status = $trnlog (lognam=in_dsc, rsllen=out_dsc, rslbuf=out_dsc);
;  585          0579  3     IF .status EQL ss$_notran                   ! No tranlation, we are done
;  586          0580  3     THEN
;  587          0581  3         EXITLOOP;
;  588          0582  3     IF NOT .status
;  589          0583  3     THEN
;  590          0584  3         $signal_stop (.status);
;  591          0585  3     !
;  592          0586  3     ! Get ready for the next loop
;  593          0587  3     !
;  594          0588  3     in_dsc [0] = .out_dsc [0];
;  595          0589  2     END;
;  596          0590  2 !
;  597          0591  2 ! Copy the local string to the output
;  598          0592  2 !
;  599          0593  3 IF NOT (status = str$copy_dx (.name, out_dsc))
;  600          0594  2 THEN
;  601          0595  2     $signal_stop (.status);
;  602          0596  2
;  603          0597  2 RETURN;
;  604          0598  1 END;


                                                                .TITLE  OPC$SHARE_TRNLOG SHARE_TRNLOG
                                                                .IDENT  \V03-001\

                                                                .EXTRN  LIB$STOP, SYS$TRNLOG
                                                                .EXTRN  STR$COPY_DX

                                                                .PSECT  $CODE$,NOWRT,2

                                                00FC 00000      .ENTRY  SHARE_TRNLOG, Save R2,R3,R4,R5,R6,R7        ; 0505
                                    57 00000000G  00   9E 00002 MOVAB   LIB$STOP, R7                                ;
                                    5E     FEF0   CE   9E 00009 MOVAB   -272(SP), SP                               ;
                                    56       04   AC   D0 0000E MOVL    NAME, R6                                   ; 0546
```

```
                                02        03    A6  91 00012          CMPB    3(R6), #2                                       ;
                                                04  13 00016          BEQL    1$                                              ;
                                                14  DD 00018          PUSHL   #20                                             ; 0548
                                                6B  11 0001A          BRB     6$                                              ;
                      10    AE          04    B6      66  28 0001C 1$:  MOVC3   (R6), @4(R6), LCL_BUF                          ; 0552
                                        08    AE      66  3C 00022      MOVZWL  (R6), IN_DSC                                    ; 0556
                                        0C    AE  10  AE  9E 00026      MOVAB   LCL_BUF, IN_DSC+4                               ; 0557
                                        04    AE  10  AE  9E 0002B      MOVAB   LCL_BUF, OUT_DSC+4                              ; 0558
                                                52  D4 00030          CLRL    I                                               ; 0562
                                        0A          52  D1 00032 2$:  CMPL    I, #10                                          ; 0568
                                                    13  19 00035      BLSS    3$                                              ;
                                        7E  0374    8F  3C 00037      MOVZWL  #884, -(SP)                                     ; 0570
                                                    56  DD 0003C      PUSHL   R6                                              ;
                                                    01  DD 0003E      PUSHL   #1                                              ;
                                        0005825C    8F  DD 00040      PUSHL   #361052                                         ;
                                        67          04  FB 00046      CALLS   #4, LIB$STOP                                    ;
                                                    04  00049        RET                                                     ;
                                        6E  0100    8F  3C 0004A 3$:  MOVZWL  #256, OUT_DSC                                   ; 0574
                                                7E  7C 0004F          CLRQ    -(SP)                                           ; 0578
                                                7E  D4 00051          CLRL    -(SP)                                           ;
                                                    0C  AE  9F 00053  PUSHAB  OUT_DSC                                         ;
                                                    10  AE  9F 00056  PUSHAB  OUT_DSC                                         ;
                                                    1C  AE  9F 00059  PUSHAB  IN_DSC                                          ;
                  00000000G     00                  06  FB 0005C     CALLS   #6, SYS$TRNLOG                                  ;
                  00000629      8F                  50  D1 00063     CMPL    STATUS, #1577                                   ; 0579
                                                    0B  13 0006A      BEQL    4$                                              ;
                                        16          50  E9 0006C     BLBC    STATUS, 5$                                      ; 0582
                                08      AE          6E  D0 0006F      MOVL    OUT_DSC, IN_DSC                                 ; 0588
                          BB            52          0A  F3 00073      AOBLEQ  #10, I, 2$                                      ; 0562
                                        4040        8F  BB 00077 4$:  PUSHR   #^M<R6,SP>                                     ; 0593
                  00000000G     00                  02  FB 0007B     CALLS   #2, STR$COPY_DX                                 ;
                                05                  50  E8 00082     BLBS    STATUS, 7$                                      ;
                                                    50  DD 00085 5$:  PUSHL   STATUS                                          ; 0595
                                67                  01  FB 00087 6$:  CALLS   #1, LIB$STOP                                    ;
                                                    04  0008A 7$:    RET                                                     ; 0598

; Routine Size:  139 bytes,    Routine Base:  $CODE$ + 0000

;  605          0599  1 END                                    ! End of SHARE_TRNLOG
;  606          0600  0 ELUDOM


;                                   PSECT SUMMARY
;
;       Name                    Bytes                           Attributes
;
;  $CODE$                         139  NOVEC,NOWRT,  RD ,  EXE,NOSHR,  LCL,  REL,  CON,NOPIC,ALIGN(2)


;                               Library Statistics
```

```
;
;
;                                        -------- Symbols --------      Pages       Processing
;       File                             Total    Loaded   Percent      Mapped      Time
;
;  _$255$DUA28:[SYSLIB]LIB.L32;1          18619        12         0        1000        00:01.8
;  _$255$DUA28:[OPCOM.OBJ]OPCOMLIB.L32;1    633         4         0          43        00:00.7
```

```
;                                   COMMAND QUALIFIERS

;       BLISS/CHECK=(FIELD,INITIAL,OPTIMIZE)/LIS=LIS$:SHARE/OBJ=OBJ$:SHARE MSRC$:SHARE/UPDATE=(ENH$:SHARE)

; Size:         603 code + 1256 data bytes
; Run Time:       00:32.2
; Elapsed Time:   02:11.0
; Lines/CPU Min:   1116
; Lexemes/CPU-Min: 12055
; Memory Used:  101 pages
; Compilation Complete
```

PASDEF
LIS

PASI02
LIS

STATUS
LIS

UNKNOWN
LIS

SHUTDOWN
LIS

SHARE
LIS

PASI01
LIS

PASI03
LIS

PASCAL

PASCLINE
LIS

TIMESTAMP
LIS